


DROP ARM AWNING SYSTEM 110



Fischer[®]

DROP ARM AWNING SYSTEM 110

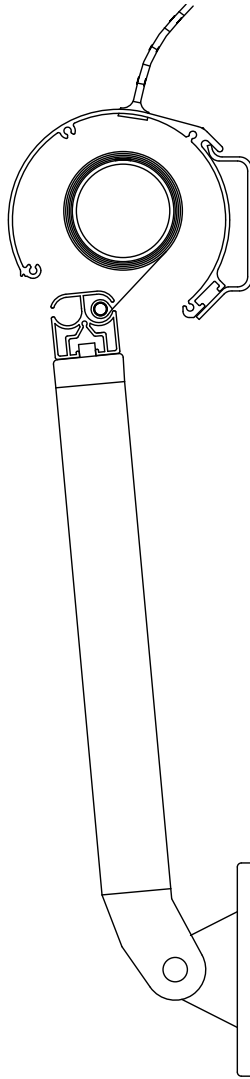

SPECIFICATIONS

CASSETTE	Extruded aluminium, cylinder-shaped ø110.			
FRONT BEAM	Extruded aluminium, 37 x 35 mm.			
ARMS	Extruded aluminium, 24 x 34 mm (base 145 x 26 mm). Arms come with built-in adjustable springs.			
PROFILE COLOUR	Standard RAL 9010 or anodised. Special RAL colours can be provided.			
TEXTILE	100% Scotchgard™ treated acrylic. Colour according to collection.			
OPERATION	External or internal crank handle or 230V motor.			
GUIDING DIMENSIONS	Motor:	Max width 320 cm	Max drop 90°: 120 cm	Max drop 120°: 110 cm.
	Motor:	Max width 550 cm	Max drop 90°: 110 cm	Max drop 120°: 90 cm.
	Internal crank handle:	Max width 320 cm	Max drop 90°: 100 cm	Max drop 120°: 100 cm.
	External crank handle:	Max width 320 cm	Max drop 90°: 100 cm	Max drop 120°: 100 cm.
	Maximum width can be increased for motorised units by serial coupling of several units.			