

# DROP ARM AWNING SYSTEM 85




*Fischer*<sup>®</sup>

# DROP ARM AWNING SYSTEM 85

Model with tape operation (small arms)

Model with crank handle/motor (large arms)

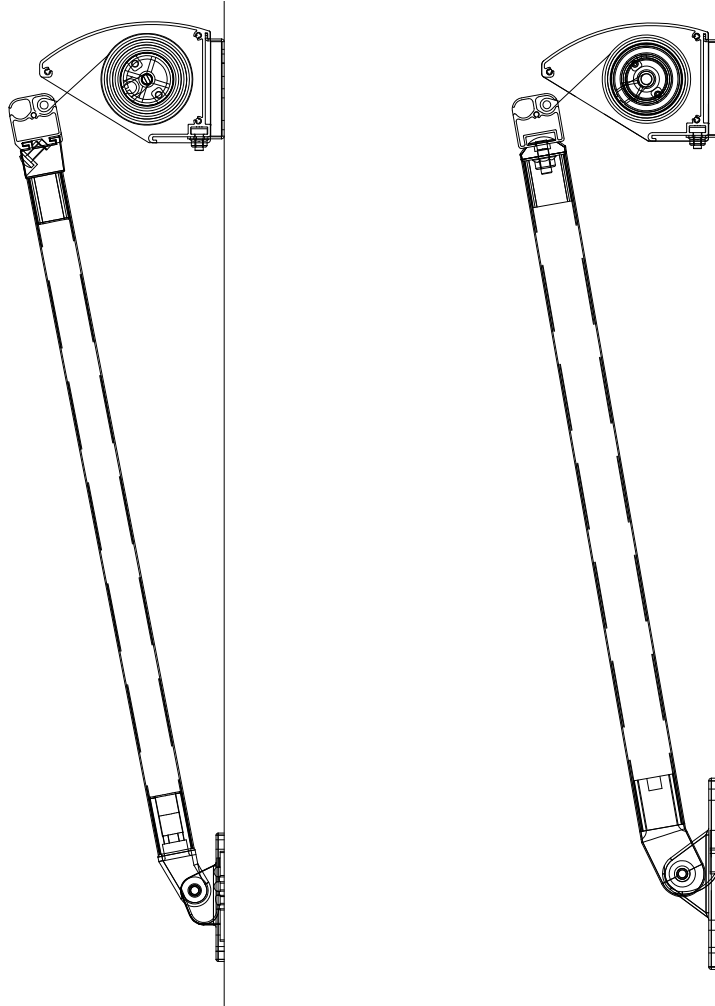

## SPECIFICATIONS

CASSETTE Extruded aluminium, 85 x 126 mm.

FRONT BEAM Model with tape operation: extruded aluminium, 37 x 35 mm.  
Model with crank handle/motor: extruded aluminium, 37 x 35 mm.

ARMS Model with tape operation: extruded aluminium, 22 x 33 mm (base 96 x 18 mm).  
Model with crank handle/motor: extruded aluminium, 24 x 34 mm (base 145 x 26 mm).  
Arms feature built-in adjustable springs.

PROFILE COLOUR Standard RAL 9010 or anodised.  
Special RAL colours can be provided.

TEXTILE 100% Scotchgard™ treated acrylic. Colour according to collection.

OPERATION Strap, internal or external crank handle, or 230V motor.

| GUIDING DIMENSIONS     | Motor:                 | Max. width 400 cm    | Max. drop 90°: 90 cm   | Max. drop 120°: 70 cm. |
|------------------------|------------------------|----------------------|------------------------|------------------------|
|                        | Internal crank handle: | Max. width 320 cm    | Max. drop 90°: 90 cm   | Max. drop 120°: 70 cm. |
| External crank handle: | Max. width 320 cm      | Max. drop 90°: 90 cm | Max. drop 120°: 70 cm. |                        |
| Tape operation:        | Max. width 320 cm      | Max. drop 90°: 80 cm | Max. drop 120°: 70 cm. |                        |