



TRACK 3226

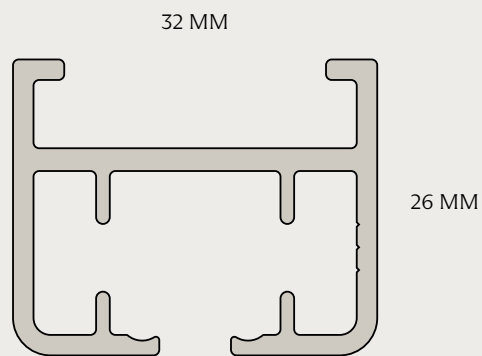


Fischer[®]

ATTACHMENTS

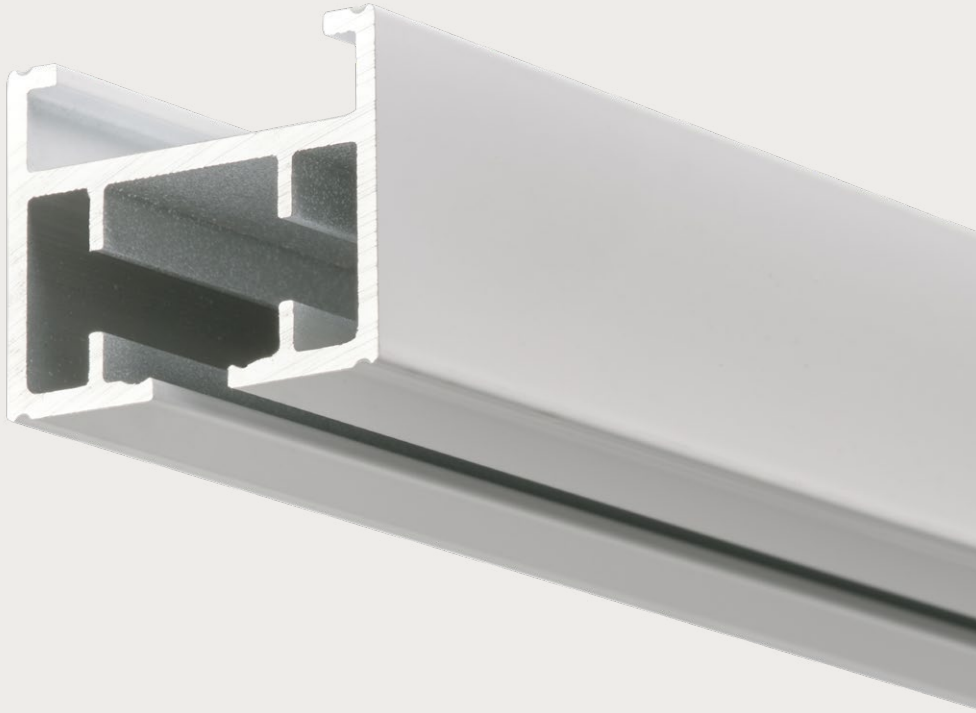

Runner electro-rail



Ceiling bracket



Extra strong angle bracket for wall mounting

SPECIFICATIONS

TRACK	Extruded aluminium.			
DIMENSIONS	Depth 32 mm, height 26 mm.			
SYSTEM COLOUR	White RAL 9010, black RAL 9005 or silver painted. RAL special colour is available on request.			
MAXIMUM WIDTH	16 metres (depending on fabric weight).			
EXTENSION	With joiner.			
OPERATION	Hand draw or motor.			
MAXIMUM CURTAIN WEIGHT	Heavy 4 kg/7 kg*.			
MIN. BENDING RADIUS	32 cm.			
LOAD CAPACITY MANUAL CHAIN PULL* ¹	Length 6 m: 20 kg.			
LOAD CAPACITY 30W MOTOR* ¹	Length 6 m: 40 kg	length 10 m: 35 kg	length 12 m: 30 kg	length 16 m: 25 kg.
LOAD CAPACITY 45W MOTOR* ¹	Length 6 m: 45 kg	length 10 m: 40 kg	length 12 m: 35 kg	length 16 m: 30 kg.
LOAD CAPACITY 60W MOTOR* ¹	Length 6 m: 60 kg	length 10 m: 50 kg	length 12 m: 40 kg	length 16 m: 30 kg.
LOAD CAPACITY 30W TANDEM MOTOR* ¹	Length 6 m: 50 kg	length 10 m: 45 kg	length 12 m: 35 kg	length 16 m: 30 kg.
LOAD CAPACITY 45W TANDEM MOTOR* ¹	Length 6 m: 60 kg	length 10 m: 55 kg	length 12 m: 40 kg	length 16 m: 35 kg.
MOUNTING	Ceiling, wall or ceiling supports.			

* Depending on rail length and motor selection. Based on a straight rail.

*¹ Straight curtain rail. Capacity is reduced for bent or curved profiles.